

Specifications

Wrapping

Package size Width: 80-350 mm (3.1-13.8 inches)
 Height: 10-130 mm (0.4-5.1 inches)
 Depth: 80-230 mm (3.1-9.0 inches)
 The combination of maximum size of each dimensions cannot be used. Maximum size of the package that can be wrapped also depends on the film to use.

Wrapping speed Max. 17 packages/min.
 Number of film roll One roll
 Film width 350-500 mm (13.8-19.7 inches)

Weighing

Interval type	Multi-interval		Single interval
Capacity	Max. 6/15kg	Max. 3/6kg	Max. 30 lb
Scale interval	e=2/5g	e=1/2g	e=0.01 lb
Weighing range	40g-15kg	20g-6kg	0.20-30 lb
Max. wrapping capacity	5kg	5kg	11 lb

Thermal printer

Label type	Die-cut label	Linerless label
Label width	25-80mm/ 0.98-3.1 inches	44-59mm/ 1.73-2.3 inches
Label length	20-150mm/ 0.79-5.9 inches	20-500mm/ 0.79-19.7 inches * * Maximum printing length is 300mm/ 11.8 inches
Dot density	12 dot/mm (300dpi)	

Operation console

Display panel TFT LCD color (12.1 inches) touch panel
 Operation keys Mechanical keys and touch screen
 Memory for programmable files .. 8.8GB

General

Power source and power consumption • 208/240V; 3Ø; 50/60Hz; 2.3kVA
 • 220-240V; 1Ø; 50/60Hz; 7.5A; 1.8kW
 Net weight Approx. 250kg
 Operation humidity 90%RH (max.) with no condensation

Options


- Second Labeler




*Specifications are subject to change without prior notice.

Dimensions


Top View



Front View

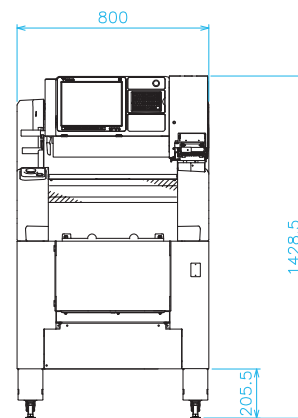

Side View

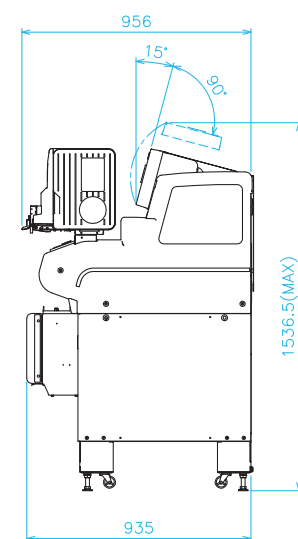

Unit = mm



AW-5600FX

Integrated semi-automatic weigh-wrap-label system
 Flexible, versatile and reliable partner



TERAOKA SEIKO CO., LTD.
 13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580 JAPAN
 www.digisystem.com



A1501CDMP

Searching for a New Balance

