

DFWLKI 3GD

"DFWLKI3GD": MULTIFUNCTION WEIGHT INDICATOR FOR ATEX 2 & 22 ZONES



Easy to programme and use, versatile and high performing weight indicator, with IP68 stainless steel case. Ideal for using in areas classified as hazardous with protection methods according to
II 3G Ex nR IIC T6 Gc X for gases
II 3D Ex tc IIIC T130°C Dc IP68 X for dust.
CE-M approvable (OIML R-76/EN 45501).

MAIN FEATURES:

- Waterproof 17-key numeric-functional keypad.
- LCD 25mm backlit display with 6 high contrast digits and icons for indication of active functions.
- Waterproof IP68 STAINLESS STEEL case, with sealed rubber gasket, easy to clean and resistant in harsh and corrosive environments.
- Dimensions in mm: 243x145x78,4 mm.
- Suitable for use on the table, column, or wall.
- A/D 24 bit converter, 4 channels, up to 200 conv./sec. autoselect and up to 8 signal linearisation points.
- Up to 10.000e or multirange 3 x 3000e @ 0,3 μ V/d in CE-M approved version for legal for trade use.
- Up to 1.000.000 displayable divisions with built-in resolution up to 3.000.000 points.
- Connection with up to 8 load cells with input resistance equal to 350 Ohm or up to 16 cells of 700 Ohm each.
- Digital calibration and set-up from keypad or from PC with DINITOOLS.
- Power supply:
 - DFWLKI3GD: through 110-240Vac internal power adapter;
 - DFWLKI3GDB: through optional external battery (BP6ESTATEX3GD code), rechargeable in safe area.

MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76

FUNCTIONS:

- KEYBOARD:
 - Zeroing, Automatic tare, Presetable tare, printing and/or data transmission, selectable function command, on/off switching, database of 10 tares, 2 numeric IDs, keyboard lock, repetition of last printout made.
- SELECTABLE FUNCTIONS:
 - High Resolution Weighing x 10.
 - Net/Gross or lb/kg conversion.
 - Accumulation.
 - Formula weighing.
 - +/- Checkweighing.
 - Percentage weighing.
 - Approved transmission of the weight to PC/PLC (with Alibi memory ALMEM option).
 - Counting (Max. resolution of 1.500.000 divisions).
 - In/Out Truck weighing.
 - Hold and Peak.

I/O SECTION

- RS232/C bidirectional port for connection to PC in safe zone.
- RS232/C bidirectional port for connection to printer or labeller in safe zone.



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI AR GEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI AR GEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI AR GEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI AR GEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

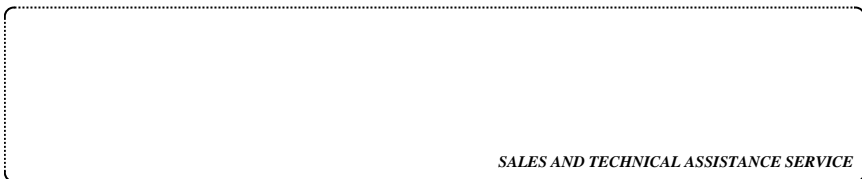

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.