

RWP Weighing Indicator

General Specifications

- | | |
|--------------------------------|------------------------------------------------------------|
| • Display | 22mm digit LCD display, with white LED backlight |
| • Keyboard | 6keys(Mechanical switch) |
| • Housing | ABS plastic |
| • Max. Divisions | 6,000e; 30,000d |
| • Load cell excitation voltage | 5V/150mA |
| • ADC update | ≤1/10 second |
| • Operate Temp | -10°C~+40°C |
| • Power | AC adapter (12V/500mA), Ni-MH batteries (1.2V/2000mAh x 6) |
| • Gross weight | 1.5kg |



- An economical general purpose instrument
- Application: 1. Check weighing 2. Net/gross shift 3. Weighing units conversion
- OIML approval from Delta(approval no.DK0199.284)
- Battery provide up to 40 hours of continuous use (without backlight)
- Standard RS-232 can connect to a mini printer, label printer or computer




RWP Weighing Indicator

Model Name	Capacity	Readability	Division	Approx. weight	Approval
RWP	X	X	30,000d	1.5kg	CE
RWP-M	X	X	6,000e	1.5kg	CE, OIML

Options



Dimensions(mm)

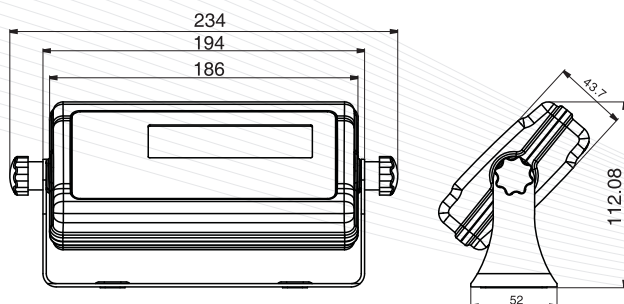

Print formats

NO.: 1
GS: 4.240KG

DATE: 2012/03/07
TIME: 19:06:37
NO.: 1
GS: 4.235KG

DATE: 2012/03/07
TIME: 19:09:03
NO.: 1
GS: 4.235KG
TOTAL: 4.235KG

DATE: 2012/03/07
TIME: 19:08:26
NO.: 2
NT: 4.235KG
TW: 1.810KG
GW: 6.045KG

DATE: 2012/03/07
TIME: 19:10:48
NO.: 3
NT: 4.235KG
TW: 1.810KG
GW: 6.045KG
TOTAL: 12.705KG

DATE: 2012/03/07
TIME: 19:10:54
TOTAL

NO: 3
Total: 12.705KG