


External Dimensions (mm)

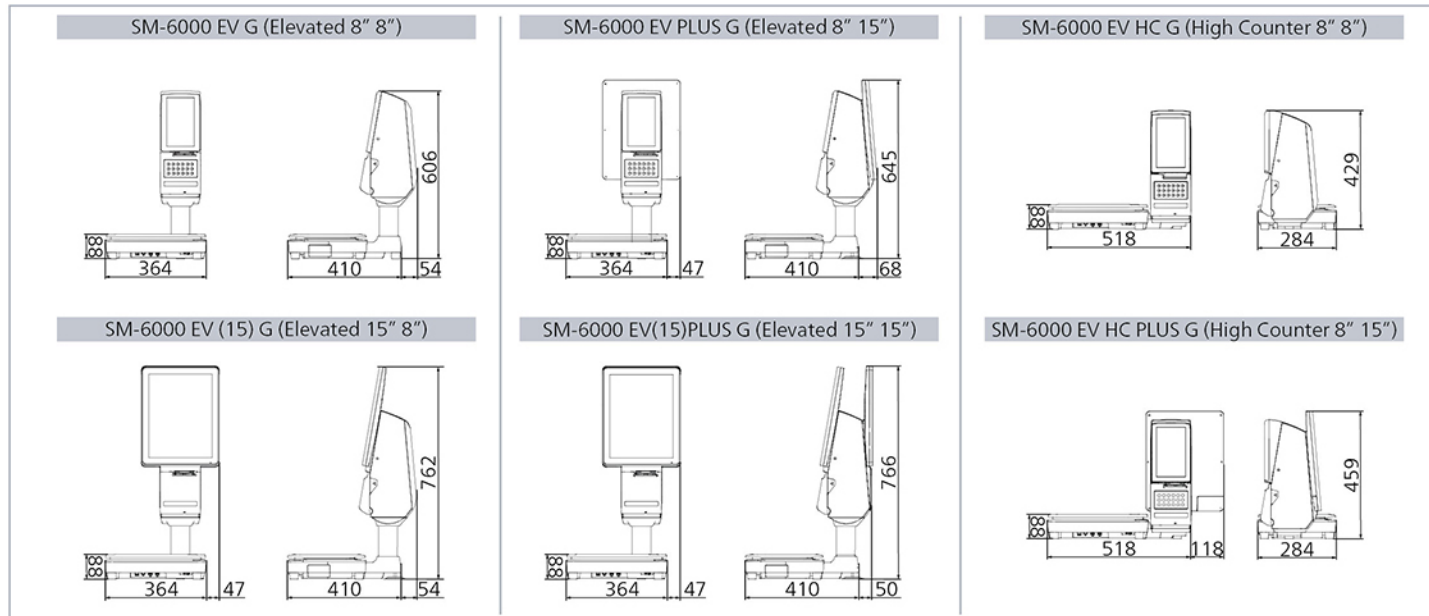

Specifications

Capacity	Resolution	Max 6kg	Max 15kg / 30lb	Max 30kg
1 / 3,000		e = 2g	e = 5g / 0.01lb	e = 10g
Single Interval	1 / 6,000	e = 1g	—	e = 5g
	1 / 7,500	—	e = 2g	—
Capacity	Resolution	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-6000 EV G (Elevated 8" 8")	SM-6000 EV PLUS G (Elevated 8" 15")	SM-6000 EV(15) G (Elevated 15" 8")	SM-6000 EV(15)PLUS G (Elevated 15" 15")	SM-6000 EV HC G (High Counter 8" 8")	SM-6000 EV HC PLUS G (High Counter 8" 15")	SM-6000 AI G (15" AI Self-Service)	SM-6000 SSP 8" G (8" Self-Service)	SM-6000 SSP 15" G (15" Self-Service)	SM-6000 SSR 8" G (8" Self-Service)	SM-6000 SSR 15" G (15" Self-Service)
Dimension WxDxH(mm)	364x464x606	411x478x645	411x464x762	411x460x766	518x284x429	636x284x459	364x464x762	364x464x606	364x464x762	515x284x552	583x284x708
Operator Display	8" TFT WVGA with Capacitive Touch (480x800)	15" TFT XGA with Capacitive Touch (1024x768)	—	—	—	—	—	—	—	—	—
Customer Display	8" TFT WVGA (480x800)	—	—	—	—	—	—	—	—	—	—

Other Variants: ***Refer to respective SM-6000 G variant's brochure for more detail

Keyboard	18 x Keypad (For 8" Operator only)										
Types	Linerless With Auto-Cutter										
Roll Diameter	Max 95mm										
Label / Receipt	Max 62mm										
Print Width	Max 61mm										
Printing Speed	Max 150mm / second ¹										
Print Resolution	300 dpi										
Power Source	Compliance to 80PLUS Power Saving ²										
Operating Temperature	-10°C to +40°C										
Humidity	15% to 85% RH Non-Condensation										
Standard Interface	Ethernet 10 / 100 Base T, 4 x USB 2.0, RJ11										
Net Weight	13.3 kg	14.9 kg	14.9 kg	21kg	12.5 kg	14.1 kg	16.7 kg	13.3 kg	14.9 kg	13.7 kg	15.6 kg
Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, e.Label with Hi-Touch, NEXA, e.Sense, BYO ³ , Enchant, Queue Printer, Base Station, Speed ID										
Factory Option	2nd Receipt Printer except all the PC Based Self-Service System Scale Printer, Auto Tilt Sensor										

80 PLUS GOLD **80 PLUS SILVER** ¹ To achieve maximum print speed, high sensitivity thermal paper is necessary. ² 100-120Vac Gold (North America, Canada and Japan) 210-240Vac Silver (European, UK and most of Asia) ³ Plastic platter required.



DIGI SINGAPORE PTE. LTD.
 4 Leng Kee Road #05-02/03/04/05/11/12
 SIS Building SINGAPORE 159088
 TEL : +65 6472 2996
 SALES: +65 6378 5387
 FAX : +65 6863 4614
 URL : www.digisystem.com/sg/
 E-MAIL : customer_support@sg.digi-group.com

TERAOKA SEIKO Co., Ltd.
 13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580, JAPAN
 TEL: +81-3-3752-2131
 FAX: +81-3-3752-5562
 URL: www.digisystem.com

SM-6000 G / D / 04265



SM-6000 G

Be Free From Limits



Searching for a New Balance

Showcasing a built-in motion-activated sensor, e.Sense can be easily installed on container or dispenser to enable automatic transmission of PLU code to the scale.

e.Sense is only available for SM-6000 G.



Be Free From Limits

Unlock Frictionless Retail with SM-6000 G



Create an enjoyable bulk shopping experience with DIGI's Bring Your Own solution. The new Auto Tare feature eliminates the need for manual calculation of container weight for quicker, fuss-free weighing.

BYO is only available for SM-6000 G.



Achieve your sustainability goals with accurate tracking of wastage by capturing its data according to type, quantity and location of disposal.

- Improve procurement planning with insights from the analysis report
- Identify near-expiry products for markdowns



Create a safe retail environment with in-store virtual queues and offer a contactless pickup experience with the integrated collection system.

- Minimise physical clustering
- Optimise waiting time with multi-department queue
- Supports API integration with third-party mobile queue app



DIGIweb lets you remotely manage scale data and label design while granting easy access to sales reports and system settings.

- Tool for remote services, software updates and network wide configuration
- Minimise downtime by providing first-level remote support service



Enable automatic clerk identification via RFID technology while preventing unauthorised access to the scale.

- Built-in clerk log report for contact tracing and operation analysis
- Available in Wristband



Wristband



DIGI Solution Ecosystem



With no backing paper and twice as many label prints on a single label, this sustainable solution helps businesses to save on storage space while reducing logistic costs.

- Quick and easy roll replacement
- Flexible label design
- Crisp and appealing label presentation



Envision the future of retail with DIGI's revolutionary Shelf Edge and Digital Signage Display.

- Enchant benefits
- In-store advertising platform
 - Vivid HD display
 - Support dynamic video and image content



Accurate, versatile and durable, DIGI's enterprise-grade electronic shelf label is developed to accelerate in-store digitisation with its error-free wireless price updates.

- Integrated QR code and Near Field Communication (NFC) capabilities
- Seamless integration with scale via USB base station for automatic price synchronisation



Combining a high definition e-Paper display with the tap-activated Hi-Touch feature, the robust e.Label offers optimal readability with swift PLU call-up.

- Error-free automatic PLU call-up
- IP67 certified for frequent cleaning
- Available in 2 sizes (2.7" & 4.2")